

Flocit

Float is a glazed porcelain range that comes in four natural stone shades, Suitable for floor and wall areas.

Float is available from stock in 300x600, 600x600 & 600x1200m so can be delivered within 1-3 days.




Float has a Slip rating of R10 PTV >36 making it suitable for wet rooms and commercial projects.

Made in Italy



FORMATS

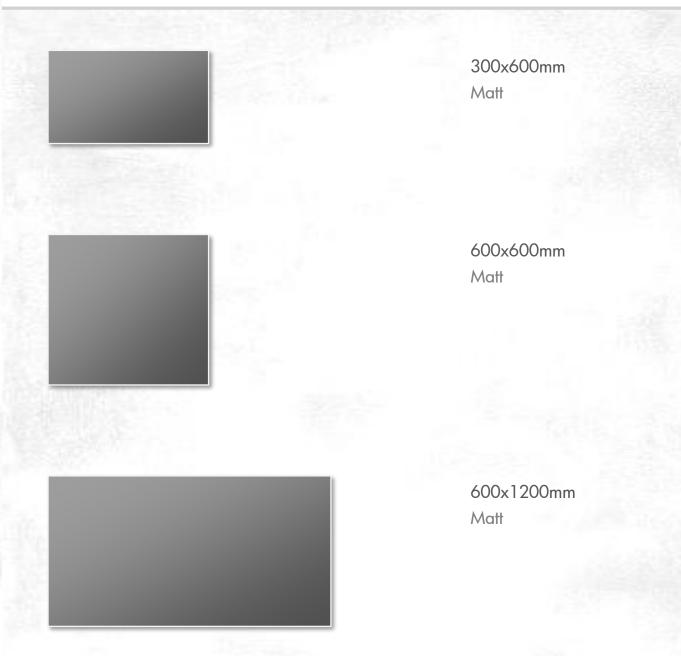

Note: dimensions provided are nominal measurements. Work sizes may deviate from nominal sizes.

COLOURS

Ice Sand Pearl Mid Grey

Note: colors provided are for illustration purpose only. Actual color may deviate from samples shown.











GROUT MATCHES



Float Sand Grout Match Mapei Ultracolour 123





Float Ice Grout Match Mapei Ultracolour 103





Float Pearl Grout Match Ardex FS Dove Grey





Float Mid Grey Grout Match Mapei Ultracolour 127

CLEANING AND MAINTENANCE



Tower Ceramics recommends Fila products to ensure the best results for your installation, from the moment it is finished and for years to come.

Initial clean :

Product required: For cement-based grout: Fila Deterdek, 1 ltr per 20 sq.m. Dilute 1:5 with water

For epoxy Grout: Fila CR10, 1 ltr per 10 sq.m. Used neat

Equipment advised: Single disc professional cleaner, liquid vacuum cleaner, bucket, cloths/sponges

Method: Lightly wet the floor then apply the solution to the floor. Allow to work for 5

minutes then use the disc cleaner to help release the dirt. Remove the solution with the vacuum cleaner, then rinse thoroughly and remove the rinsing water

with the vacuum cleaner. Allow to dry.

Standard clean :

Product required: Fila FilaCleaner. Dilute 1:200 with water

Equipment advised: Bucket and mop/cloth, although professional equipment will be quicker and

more efficient

Method: Apply the dilute solution over the floor, and remove it with a mop once stains

are removed. Rinse if especially dirty. Increase concentration up to 1:30 may

be used although this will require rinsing with water.

Intensive clean :

Product required: Fila PS87. Dilute 1:5 with water

Equipment advised: Single disc professional cleaner, liquid vacuum cleaner, bucket, cloths/sponges

Method: Lightly wet the floor then apply the diluted solution to the floor. Allow to work

for 5 minutes then use the disc cleaner to help release the dirt. Remove the solution with the vacuum cleaner, then rinse thoroughly and remove the rinsing

water with the vacuum cleaner. Allow to dry

<u>Always</u> trial cleaning products/process on a test area first to ensure suitability. For other cleaning issues we recommend the full range of Fila Solutions products. See www.filasolutions.com/eng for a complete list of products, method statements, technical datasheets and safety datasheets.

For any additional technical information please contact our sales office.

